

Heavy Duty Wheels

■ Flange wheels with fixed castors



Model SF ... S-A (B), S-A (B)/P

Range of application:

- For transporting loads at a maximum speed of 100 m/min.
- Flange wheels for use on profiles.
- Frequently used on construction sites.
- Frequent use in machine factories.


Characteristics of the model ...SF ... S-A, SF ... S-A/P:

- Solid steel construction for fixed castors.
- Position of fixing holes in top plate can be arranged to suit customers' requirements.

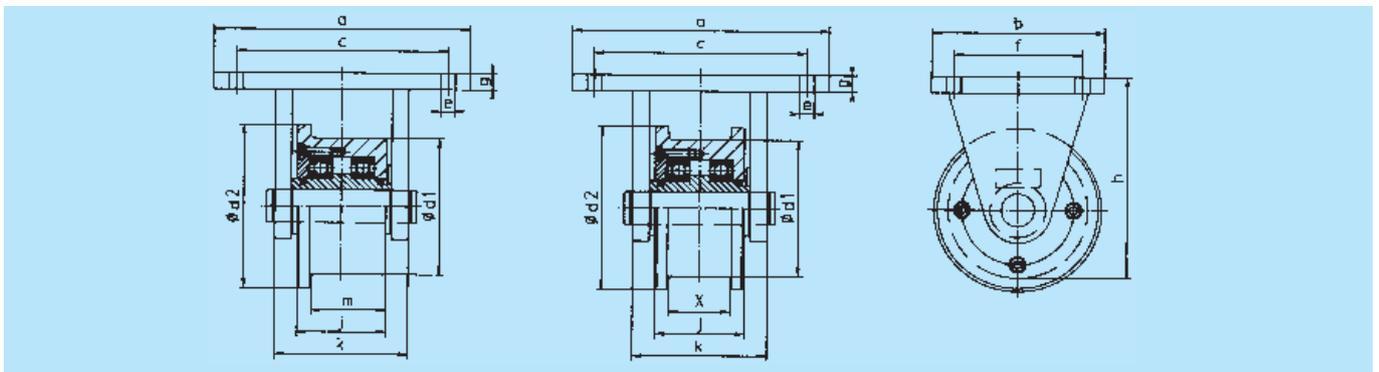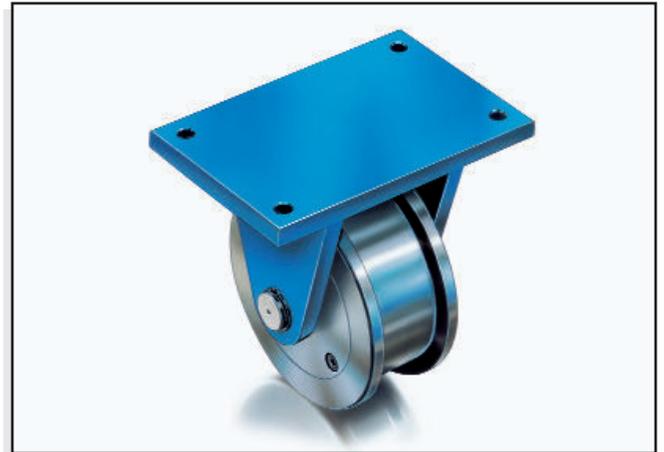

Model SF ... S-A(B)

Mod.		a	b	c	Ø d1	Ø d2	Ø e	f	g	h	j	k	m	x max	Suitable castors	Carrying capacity (kN)	Weight (kg)	
1 Flange	2 Flanges																A	B
SF 125 S-A	SF 125 S-B	220	150	190	125	150	14	115	15	180	80	120	67.5	55	SF	20	14.5	14.9
SF 150 S-A	SF 150 S-B	220	150	190	150	175	14	115	15	210	80	120	67.5	55	SF	25	17.2	17.7
SF 175 S-A	SF 175 S-B	220	150	190	175	200	14	115	15	235	80	120	67.5	55	SF	30	21.9	22.5
SF 200 S-A	SF 200 S-B	220	150	190	200	225	14	115	15	260	80	120	67.5	55	SF	30	27.3	28.0

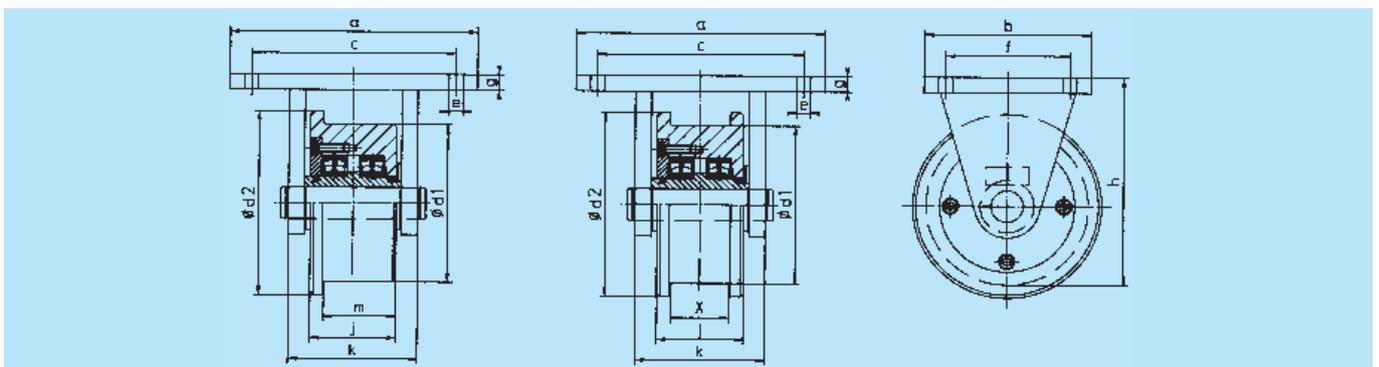

Model SF ... S-A(B)/P

Mod.		a	b	c	Ø d1	Ø d2	Ø e	f	g	h	j	k	m	x max	Suitable castors	Carrying capacity (kN)	Weight (kg)	
1 Flange	2 Flanges																A	B
SF 150 S-A/P	SF 150 S-B/P	220	170	180	150	175	18	130	20	195	80	130	67.5	55	SF	40	17.4	17.9
SF 175 S-A/P	SF 175 S-B/P	220	170	180	175	200	18	130	20	220	80	130	67.5	55	SF	40	22.1	22.7
SF 200 S-A/P	SF 200 S-B/P	220	170	180	200	225	18	130	20	245	80	130	67.5	55	SF	50	27.5	28.2
SF 225 S-A/P	SF 225 S-B/P	220	170	180	225	275	18	130	20	285	80	130	67.5	55	SF	50	33.7	34.5
SF 250 S-A/P	SF 250 S-B/P	270	210	210	250	300	18	160	20	310	80	130	67.5	55	SF	65	42.9	43.7