

Heavy Duty Wheels


Model SF ... G



Range of application:

- For quiet running, which doesn't damage the ground.

■ Fixed castors

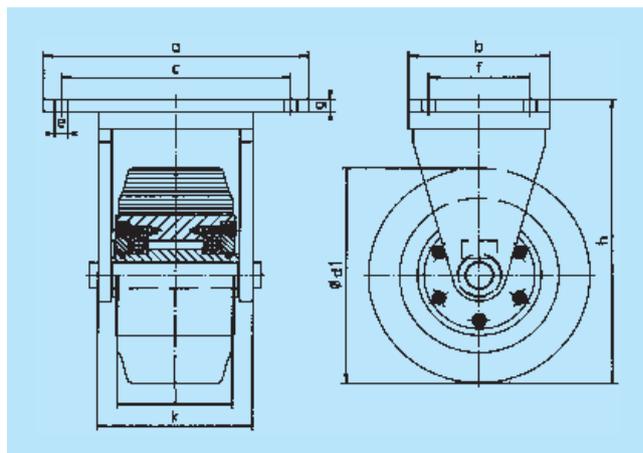

Characteristics of the model SF ... G:

- Fixed castor with rubber tyre.

Model SF ... G

Mod.		a	b	c	Ø d1	Ø e	f	g	h	j	k	Suitable castors	Carrying capacity (kN)	Weight (kg)
Rubber														
SF 250 G		300	150	260	250	14	115	15	330	130	175	SD	10	23.0
SF 265 G		300	150	260	265	14	115	15	345	160	205	SD	15	25.0


Model SD ... G



Range of application:

- For quiet running, which doesn't damage the ground.

■ Guidable swivel rollers – Drawing No. R10

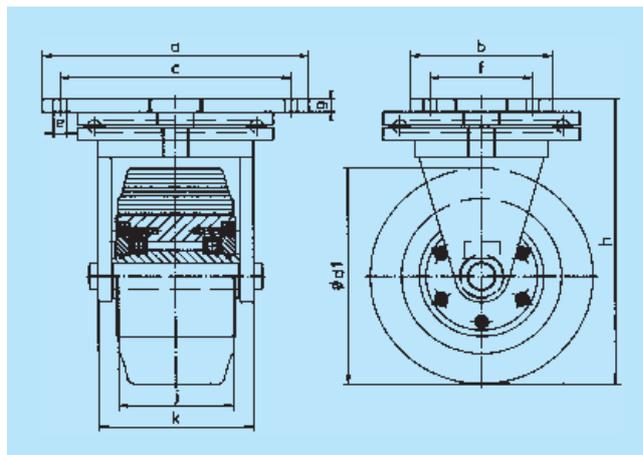

Characteristics of the model SD ... G:

- Swivel castor with rubber tyre.

Model SD ... G

Mod.		a	b	c	Ø d1	Ø e	f	g	h	j	k	Suitable castors	Carrying capacity (kN)	Weight (kg)
Rubber														
SD 250 G		300	150	260	250	14	115	15	330	130	175	SF	10	29.0
SD 265 G		300	150	260	265	14	115	15	345	160	205	SF	15	31.0